

50 Watt


AL50M10

182mm 28Cells
PV Mono Module

Electrical Characteristics

组件型号	Module Type	AL50M10
		STC
额定功率	Maximum Power- Pmax(W)	50
开路电压	Open Circuit Voltage - Voc(V)	19.12
短路电流	Short- Circuit Current - Isc(A)	3.18
工作电压	Voltage at Pmax -Vmp(V)	16.53
工作电流	Current at Pmax - Imp(A)	3.02
组件效率	Module Efficiency - η m(%)	17.83
功率公差	Power Tolerance(W)	0, +4.99W
最高系统电压	Maximum System Voltage(V)	700Vdc (IEC / UL)
最大额定熔断电流	Maximum Series Fuse Rating (A)	10A

标准测试条件STC: 光照强度Irradiance 1000W/m², 组件温度Cell Temperature 25°C, 大气质量AM 1.5

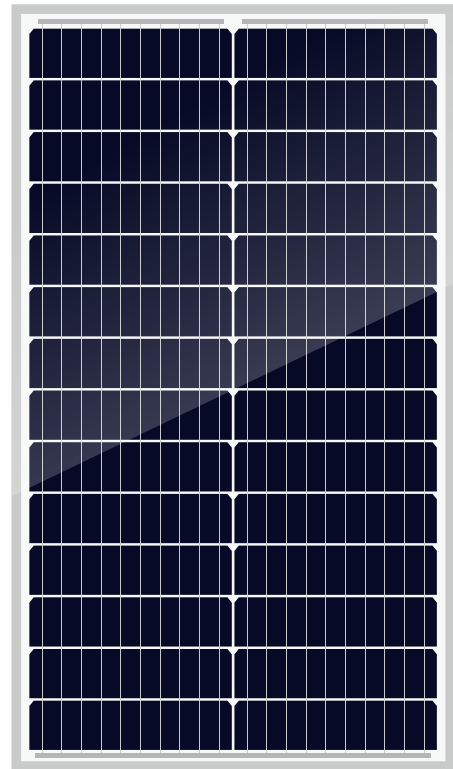

Mechanical Specifications

组件尺寸	External Dimensions	710*395*25mm
重量	Weight	3.09kg
电池	Solar Cells	Mono crystalline 182X45.5mm (2X14pcs)
玻璃	Front Glass	3.2 mm tempered glass
边框	Frame	Aluminum
接线盒	Junction Box	IP67
输出导线	Output Cables	30cm, length can be customized
连接器	Connector	MC4 Compatible
机械载荷	Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

最大功率温度系数	Pmax Temperature Coefficient	-0.350%/C
开路电压温度系数	Voc Temperature Coefficient	-0.270%/C
短路电流温度系数	Isc Temperature Coefficient	+0.048%/C
光伏组件工作温度	Operating Temperature	-40~+85 C
额定工作电池片温度	Nominal Operating Cell Temperature(NOCT)	45±2 C

Packing Configuration

组件型号	Module Type	AL50M10
组件尺寸	Module Dimensions	710*395*25mm
托盘尺寸	Pallet Dimensions	770*1100*930mm
每托重量	Pallet Weight	280kg
每托数量	Pieces/Pallet	80pcs

